
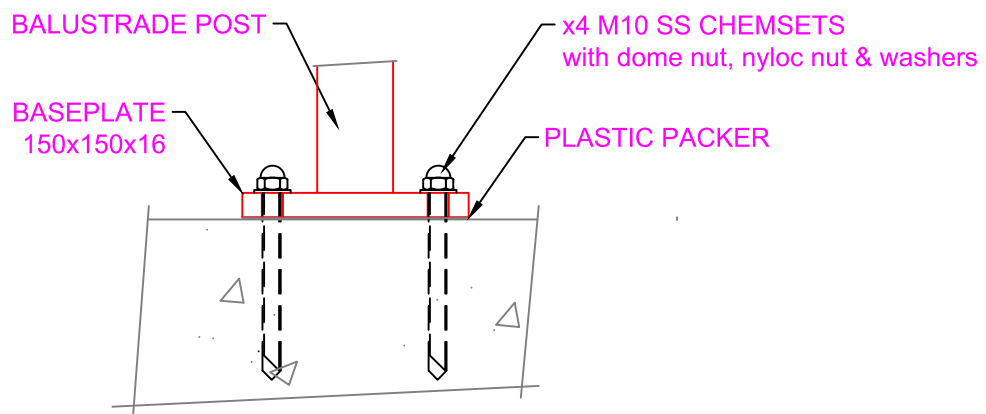


Skyrail A Series Balustrade System

A-Concrete-Top Fix, Direct

A-36
 10/4/19

Option: Direct Fix and 2 No
 Fixings



Notes

- 1 The project designer must ensure the design complies with the NZ Building Code
- 2 This design is suitable for occupancies A, A Other and C3
3. This design is suitable for all wind loads up to 3.0 kPa (glass option)
- 4 Maximum post spacing is 1500mm.
- 5 Maximum height is 1250mm above CL of top fixing
- 6 All fixings must be stainless steel
- 7 Glass can be 6, 8, 10 or 12mm t'ed, 4+4,4+5 or 5+5 laminated t'ed